GOVERNMENT OF INDIA MINISTRY OF RAILWAYS

LOK SABHA UNSTARRED QUESTION NO. 3111 TO BE ANSWERED ON 19.03.2025

MEASURES FOR ENHANCEMENT OF PASSENGERS SAFETY IN RAILWAYS

3111. MS. PRANITI SUSHILKUMAR SHINDE:

Will the Minister of RAILWAYS be pleased to state:

- (a) whether the Government is aware that as per last year's Railways data from its 17 railway zones, 351 people have died and 970 injured in 200 consequential railway accidents during the last five years, if so, the reasons therefor;
- (b) the steps being taken by the Government to enhance railway safety and prevent such accidents in the future; and
- (c) the measures implemented/being implemented by the Government to address gaps in railway infrastructure and ensure passenger safety?

ANSWER

MINISTER OF RAILWAYS, INFORMATION & BROADCASTING AND ELECTRONICS & INFORMATION TECHNOLOGY


(SHRI ASHWINI VAISHNAW)

(a) to (c): As a consequence of various safety measures taken over the years, there has been a steep decline in the number of accidents. Consequential Train Accidents have reduced from 135 in 2014-15 to 40 in 2023-24 as shown in the graph below.

It may be noted that the consequential train accidents during the period 2004-14 was 1711 (average 171 per annum), which has declined to

678 during the period 2014-24 (average 68 per annum) i.e. a reduction of 60%.

Another important index showing improved safety in train operations is Accidents Per Million Train Kilometer (APMTKM) which has reduced from 0.11 in 2014-15 to 0.03 in 2023-24, indicating an improvement of approx. 73% during the said period.

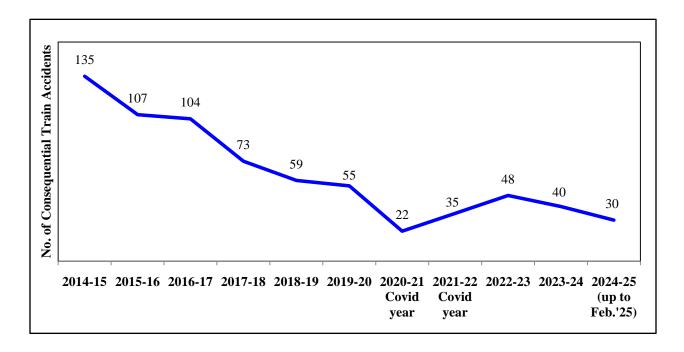

Consequential Train Accidents on Indian Railways and casualties (including railway passengers and railway personnel) therein are as follows:

Period	No. of Consequential Train Accidents	No. of Deaths	No. of Injuries
2004-05 to 2013-14	1711	904	3155
2014-15 to 2023-24	678	748	2087

During the last five years i.e., from 2020-21 to 2024-25 (upto February 2025), a total of 175 consequential train accidents have taken place over Indian Railways. In these accidents 366 persons have lost their lives and 969

persons sustained injuries. The causes of these accidents broadly include track defects, loco/coach defects, equipment failures, human errors etc.

Safety is accorded the highest priority on Indian Railways. The various safety measures taken to enhance safety in train operations are as under:-

1. On Indian Railways, the expenditure on Safety related activities has increased over the years as under:

Expenditure on S	afety relate	d activities	(Rs. in Cr.)	
	2013-14	2022-23	2023-24	RE 2024-25
	(Act.)	(Act.)	(Act.)	
Maintenance of Permanent Way & Works	9172	18,115	20,322	21,800
Maintenance of Motive Power and Rolling Stock	14796	27,086	30,864	31,540
Maintenance of Machines	5406	9,828	10,772	12,112
Road Safety LCs and ROBs/ RUBs	1986	5,347	6,662	8,184
Track Renewals	4985	16,326	17,850	22,669
Bridge Works	390	1,050	1,907	2,130
Signal & Telecom Works	905	2,456	3,751	6,006
Workshops Incl. PUs and Misc. expenditure on Safety	1823	7,119	9,523	9,581
Total	39463	87,327	1,01,651	1,14,022

 Electrical/Electronic Interlocking Systems with centralized operation of points and signals have been provided at 6,617 stations up to 31.01.2025 to eliminate accident due to human failure.

- Interlocking of Level Crossing (LC) Gates has been provided at 11,083
 Level Crossing Gates up to 31.01.2025 for enhancing safety at LC gates.
- 4. Complete Track Circuiting of stations to enhance safety by verification of track occupancy by electrical means has been provided at 6,625 stations up to 31.01.2025.
- 5. Kavach is a highly technology intensive system, which requires safety certification of highest order. Kavach was adopted as a National ATP system in July 2020. Kavach is provided progressively in phased manner. Kavach has already been deployed on 1548 RKm on South Central Railway and North Central Railway. Presently, the work is in progress on Delhi-Mumbai and Delhi-Howrah corridors (approximately 3000 Route Km). Track side works on these routes have been completed on about 1969 RKm. Regular trials are being done on these sections.
- 6. Detailed instructions on issues related with safety of Signalling e.g. mandatory correspondence check, alteration work protocol, preparation of completion drawing, etc. have been issued.
- 7. System of disconnection and reconnection for S&T equipment as per protocol has been re-emphasized.
- 8. All locomotives are equipped with Vigilance Control Devices (VCD) to improve alertness of Loco Pilots.
- 9. Retro-reflective sigma boards are provided on the mast which is located two OHE masts prior to the signals in electrified territories to alert the crew about the signal ahead when visibility is low due to foggy weather.
- 10. A GPS based Fog Safety Device (FSD) is provided to loco pilots in fog affected areas which enables loco pilots to know the distance of the approaching landmarks like signals, level crossing gates etc.

- 11. Modern track structure consisting of 60kg, 90 Ultimate Tensile Strength (UTS) rails, Prestressed Concrete Sleeper (PSC) Normal/Wide base sleepers with elastic fastening, fanshaped layout turnout on PSC sleepers, Steel Channel/H-beam Sleepers on girder bridges is used while carrying out primary track renewals.
- 12. Mechanisation of track laying activity through use of track machines like PQRS, TRT, T-28 etc to reduce human errors.
- 13. Maximizing supply of 130m/260m long rail panels for increasing progress of rail renewal and avoiding welding of joints, thereby improving safety.
- 14. Ultrasonic Flaw Detection (USFD) testing of rails to detect flaws and timely removal of defective rails.
- 15. Laying of longer rails, minimizing the use of Alumino Thermic Welding and adoption of better welding technology for rails i.e. Flash Butt Welding.
- 16. Monitoring of track geometry by OMS (Oscillation Monitoring System) and TRC (Track Recording Cars).
- 17. Patrolling of railway tracks to look out for weld/rail fractures.
- 18. The use of Thick Web Switches and Weldable CMS Crossing in turnout renewal works.
- 19. Inspections at regular intervals are carried out to monitor and educate staff for observance of safe practices.
- 20. Web based online monitoring system of track assets viz. Track database and decision support system has been adopted to decide rationalized maintenance requirement and optimize inputs.
- 21. Detailed instructions on issues related with safety of Track e.g. integrated block, corridor block, worksite safety, monsoon precautions etc. have been issued.

- 22. Preventive maintenance of railway assets (Coaches & Wagons) is undertaken to ensure safe train operations.
- 23. Replacement of conventional ICF design coaches with LHB design coaches is being done.
- 24. All unmanned level crossings (UMLCs) on Broad Gauge (BG) route have been eliminated by January 2019.
- 25. Safety of Railway Bridges is ensured through regular inspection of Bridges. The requirement of repair/rehabilitation of Bridges is taken up based upon the conditions assessed during these inspections.
- 26. Indian Railways has displayed Statutory "Fire Notices" for widespread passenger information in all coaches. Fire posters are provided in every coach so as to educate and alert passengers regarding various Do's and Don'ts to prevent fire. These include messages regarding not carrying any inflammable material, explosives, prohibition of smoking inside the coaches, penalties etc.
- 27. Production Units are providing Fire detection and suppression system in newly manufactured Power Cars and Pantry Cars, Fire and Smoke detection system in newly manufactured coaches. Progressive fitment of the same in existing coaches is also underway by Zonal Railways in a phased manner.
- 28. Regular counselling and training of staff is undertaken.
- 29. Concept of Rolling Block introduced in Indian Railways (Open Lines)
 General Rules vide Gazette notification dated 30.11.2023, wherein
 work of integrated maintenance/ repair/replacement of assets is
 planned up to 52 weeks in advance on rolling basis and executed as
 per plan.

The details of the Safety related works undertaken by Railways are tabulated below:-

		2004-05 to		2014-24 Vs.
SN	Item	2004-05 to	2014-15 to 2023-24	2014-24 VS. 2004-14
	Track Maintenance	2013-14		2004-14
		T	<u> </u>	
1.		47,038	1,09,577	2.33 times
	Renewal (Rs. in Cr.)			
2.	Rail Renewal Primary	32,260	43,335	1.34 times
	(Track Km)			
3.	0	57,450	1,23,717	2.15 times
	Kg) (Km)			
4.	J. J	9,917	68,233	6.88 times
	(Km)			
5.	,	20,19,630	26,52,291	1.31 times
	detection) Testing of Rails			
	(Track km)			
6.	,	79,43,940	1,73,06,046	2.17 times
	detection) Testing of Welds			
	(Nos.)			
7.		14,985	31,180	2.08 times
	(Track km)			
8.	Weld failures (Nos.)	In 2013-14:	In 2023-24: 481	87 %
		3699		reduction
9.	Rail fractures (Nos.)	In 2013-14:	In 2023-24: 383	85%
		2548		reduction
10	Thick Web Switches (Nos.)	Nil	21,127	
11	Track Machines (Nos.)	As on	As on 31.03.24 =	122%
	,	31.03.14 =	1,661	increase
		748	·	
	Level Crossing Gate			
	Elimination			
1.	Elimination of Unmanned	As on	As on 31.03.24:	100%
"	Level Crossing Gates	31.03.14:	Nil(All eliminated by	reduction
	(Nos.)	8948	31.01.19)	
2.	Elimination of Manned	1,137	7,075	6.21 Times
	Level Crossing Gates	.,	1,570	J
	(Nos.)			
3.	Road over Bridges (RoBs)/	4,148	11,945	2.88 Times
	Road under Bridges (RUBs)	-,,1-0	11,040	2100 1111103
	(Nos.)			
	(11031)			

				_
4.	Expenditure on LC Elimination (LC+ROB+RUB)	8,825	41,957	4.75 Times
	Bridge Rehabilitation			
1.	Expenditure on Bridge Rehabilitation (Rs. in Cr.)	3,924	8,255	2.10 Times
	Signalling Works			
1.	Electronic Interlocking (Stations)	837	2,964	3.52 times
2.	Automatic Block Signaling (Km)	1,486	2,497	1.67 times
3.	Fog Pass Safety Devices	As on	As on 31.03.24:	219 times
	(Nos.)	31.03.14: 90	19,742	
	Rolling Stock			
1.	Manufacture of LHB Coaches (Nos.)	2,337	36,933	15.80 times
2.	Provision of Fire and Smoke Detection System in AC coaches (Nos. of Coaches)	0	19,271	
3.	Provision of Fire Detection and Suppression System in Pantry and Power Cars (Nos. of Coaches)	0	2,991	
4.	Provision of Fire Extinguishers in Non -AC coaches (Nos. of Coaches)	0	66,840	
